


Item	Fiber Media Converter
Model No.	AOM-3102
Description	2 ports 10/100/1000Base-TX to 1000Base-FX
	

Overview


AOM-3102 Serial 10/100/1000M Fiber Media Converter translates the signal from Two twist-pair 10/100/1000Base-TX cable to 1000Base-FX fiber optic cable, extends data transmission distance from 100m via copper cables to 120km by fiber optic cable

Features


- 10/100/1000Mbps auto-sensed, easily upgrade
- Full-duplex and half-duplex auto-sensed
- MDI/MDI-X Auto Negotiation
- 10/100/1000Mbps store-and-forward
- Packet size up to1916bytes
- Supporting VoIP /QoS packets
- Support flow control and reduce broadcast packets
- Supporting STP to form a redundant network
- Extremely low power consumption, low heat, stable performance
- Providing Desktop, Wall-mounted, Chassis installation

Application

- Network Communication
- FTTH / FTTB / FTTx
- ISP Backhaul Networking

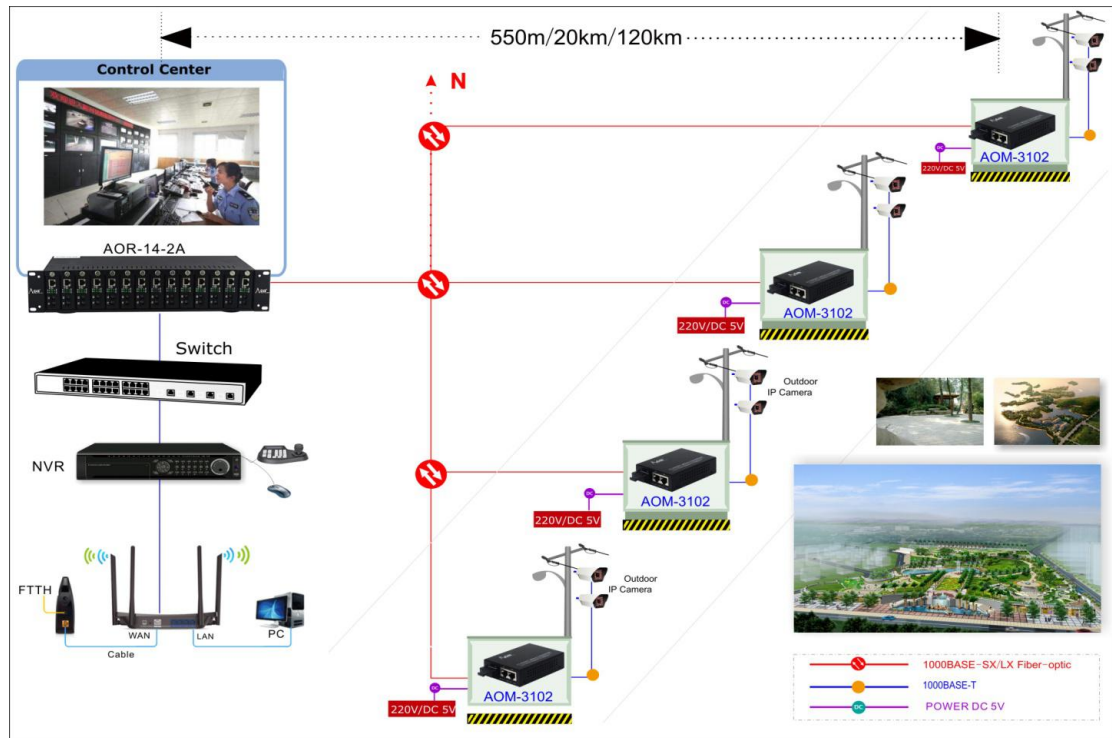

Mechanical Dimensions (For external power adaptor type)

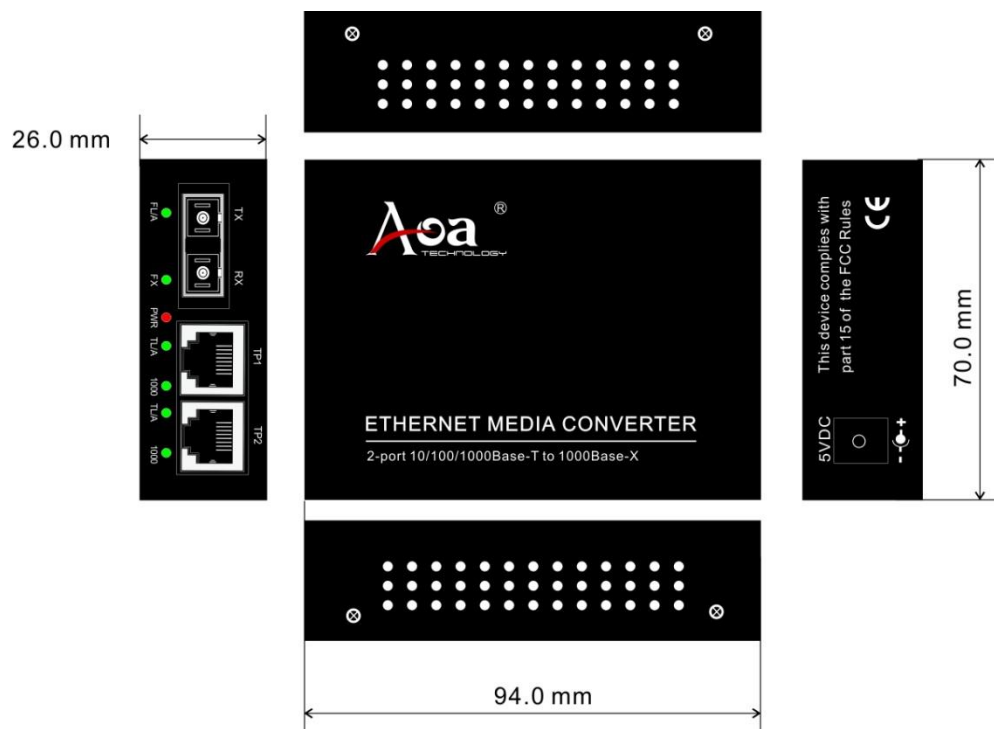

Technical Indexes

Standards	IEEE802.3 10BaseT IEEE802.3u 100BaseT(X) IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-SX/LX IEEE802.3x Flow control and back pressure IEEE802.1d Spanning Tree
Performance	Processing Type: Store and Forward Back Bandwidth: 4Gbps MAC Address Size: 16Kbit Packet Buffer Size: 1Mbit Time Delay: <10us Frame: 1916bytes
Copper Port	Data Rate: 10/100/1000M Connector: RJ45 Distance: 100m
Fiber Port	Data Rate: 1000M Connector: SC as default, FC/ST/LC(SFP slot) Optional Distance: MMF 2km, SMF 20/40/80/100/120km, Bi-di: 20/40/80/100/120km
LED indicators	FX (Fiber link is in correct connection) FL/A (optical link/action) TL/A (twisted pairs link/action) 1000 (1000M transmission rate of twisted pairs) PWR (power supply)
Power supply	Working power: DC5V 2A AC Power Supply: 100V~ AC240V to 5V2A External / Internal Power Supply Optional
Environment	Operating temperature : -20~65°C Storage Temperature: -40~85°C Relative Humidity: 5-95% (no condensation)
Physical Characteristics	Installation: Desk-top, wall mounting, Chassis Dimension: 94*70*26mm (External power supply) Weight: 0.4kg (External power supply)

Order Information

Model No.	Data Rate	Fiber Mode	Wavelength	Fiber Connector	Distance	Power Supply
AOM-3102-SFP	Depends on SFP module					
AOM-3102-M05-EA	10/100/1000M	MMF	850nm	SC	550m	Ex.AC220V
AOM-3102-S20-EA	10/100/1000M	SMF	1310nm	SC	20km	Ex.AC220V
AOM-3102-A20-EA	10/100/1000M	Bi-di	TX1310/RX1550nm	SC	20km	Ex.AC220V
AOM-3102-B20-EA	10/100/1000M	Bi-di	TX1550/RX1310nm	SC	20km	Ex.AC220V

Relative Product

14 Slot Chassis System For Standalone Type	
AOR-14-2A	14 Slot Chassis with double AC220V Power Supply, for standalone type
AOR-14-2D	14 Slot Chassis with double DC48V Power Supply, for standalone type

UÚVQ]PÚÁ QPÁUT HEGÜÚÁ QPÁÚÁÜSÜÖÖYÁ ÜÜVÖÖÁŠÖK
 [!^]á}•Áááá^ÁU^æ^Á&}•~|c
 OFEGUYT T HHHHG, FEF EFEEVYLNFECAUYAT T
 OFEGT SY HHHHG, FEF EFEEVYLNFECAUYAT T AGST
 OFEGSPUT HHHHG, FEF EFEEVYLNFECA SPÄT
 OFEGÖYUT HHHHG, FEF EFEEVYLNFECA SPÄT Á €ST
 OFEGV HHHHG, FEF EFEEVYLNFECA SPÄT Á ÁÖÖÜ
 OFEGÖ HHHHG, FEF EFEEVYLNFECA SPÄT Á ÁÖÖÜ